

Finite element simulations of the bending of an IPMC sheet

D. Pugal^{a,b}, H. Kasemägi^a, K.J. Kim^b, M. Kruusmaa^a, A.Aabloo^a

^aInstitute of Technology, Tartu University, Estonia

^bActive Materials and Processing Laboratory, Mechanical Engineering Department, University of Nevada, Reno, NV, U.S.A

03/20/2007

Background




- IPMC – ionic polymer-metal composites are highly porous polymer materials, such as Nafion, filled with some kind of ionic conductive liquid.
- The sheet of polymer material is coated with a thin metal layer – usually platinum or gold.
- In electric field, freely movable ions inside the polymer migrate towards an electrode, causing expansion of material at the one end and contraction at the other end.
- FEM – Finite Element Method
 - Used as a technic of modeling in this work

Introduction



- The goal: a time dependent FEM model for an IPMC
- Domains to be considered:
 - Mechanical
 - Electrostatic
 - Mass transfer
- The designed model is 2D
- Adding more complexity – electrochemical reactions

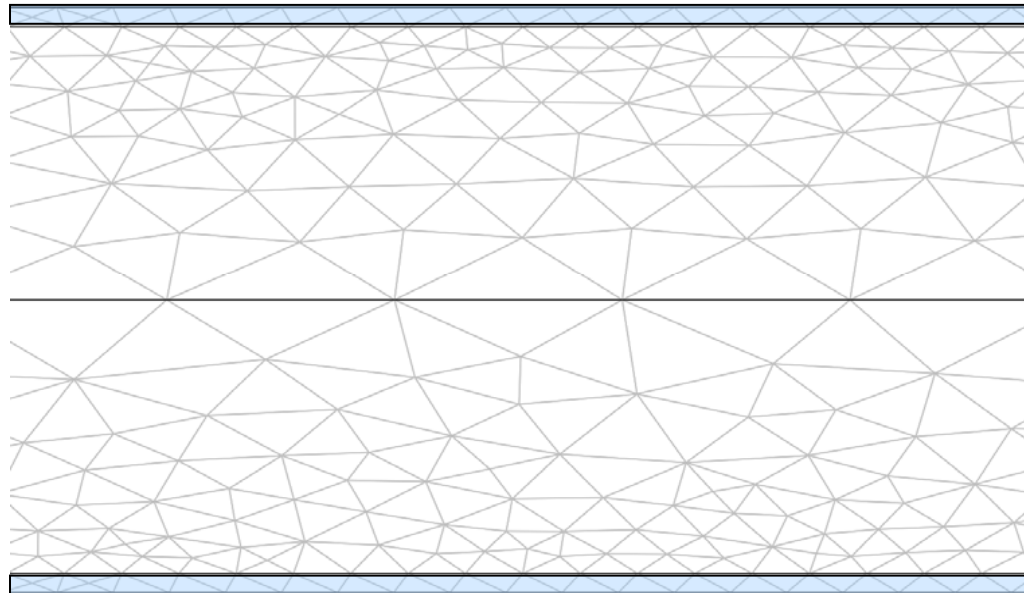

Simulations – cation migration




- Nernst-Planck equation:

- Diffusion
- Migration
- Convection

$$\frac{\partial C_i}{\partial t} + \nabla \cdot (-D_i \nabla C_i - z_i \mu_i C_i \nabla \phi) = -\vec{u}_i \cdot \nabla C_i$$

- Voltage causes migration of cations towards cathode
 - That's also the cause of the current in the circuit
- All anions are fixed to the polymer backbone

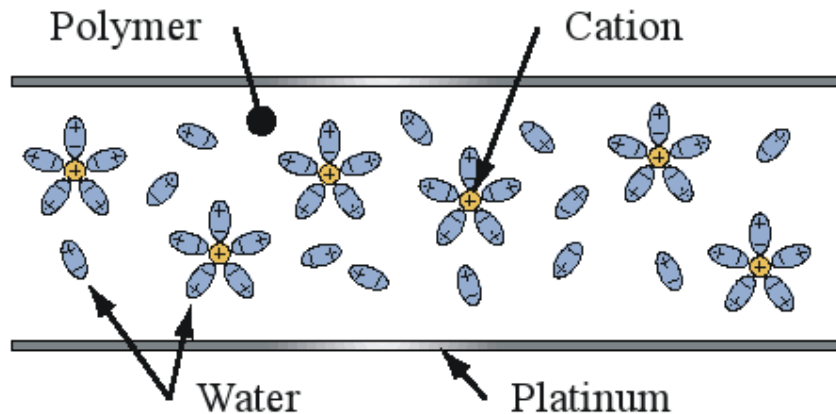

Simulations – cation migration (2)




- Charge imbalance inside the IPMC results in electric field
 - opposite to the applied field


- Gauss' law:

$$\nabla \vec{E} = \frac{F \cdot \rho}{\varepsilon}$$

- Steady state of cations – when the generated field cancels out applied field.

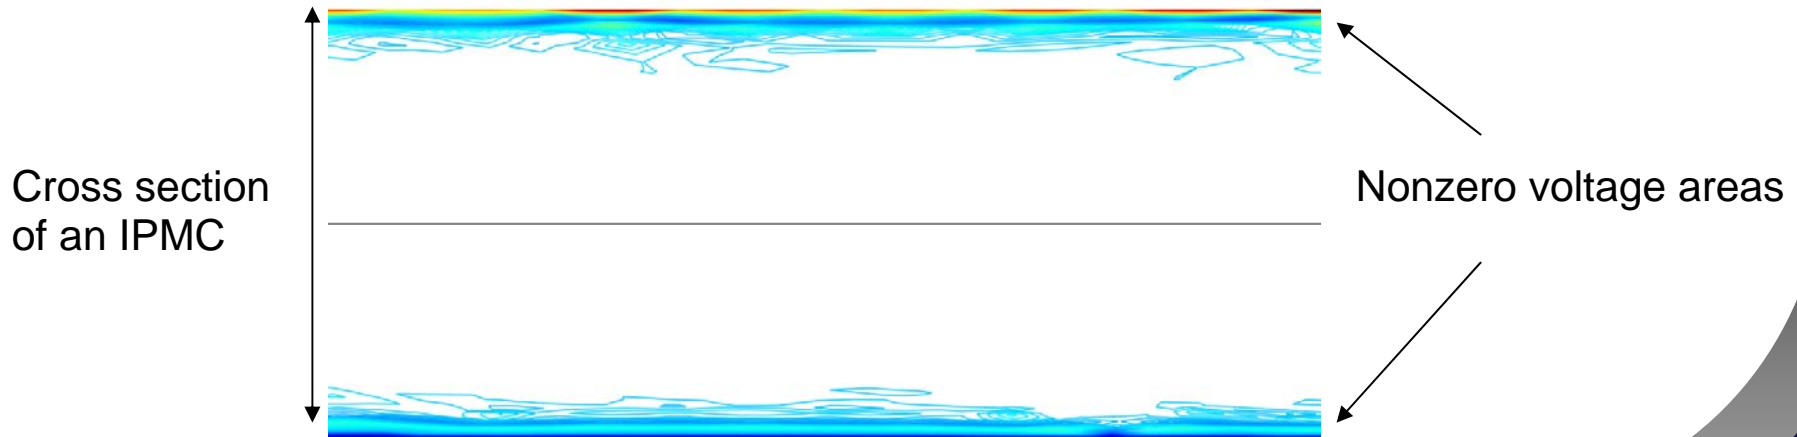

Simulations – cation migration (3)

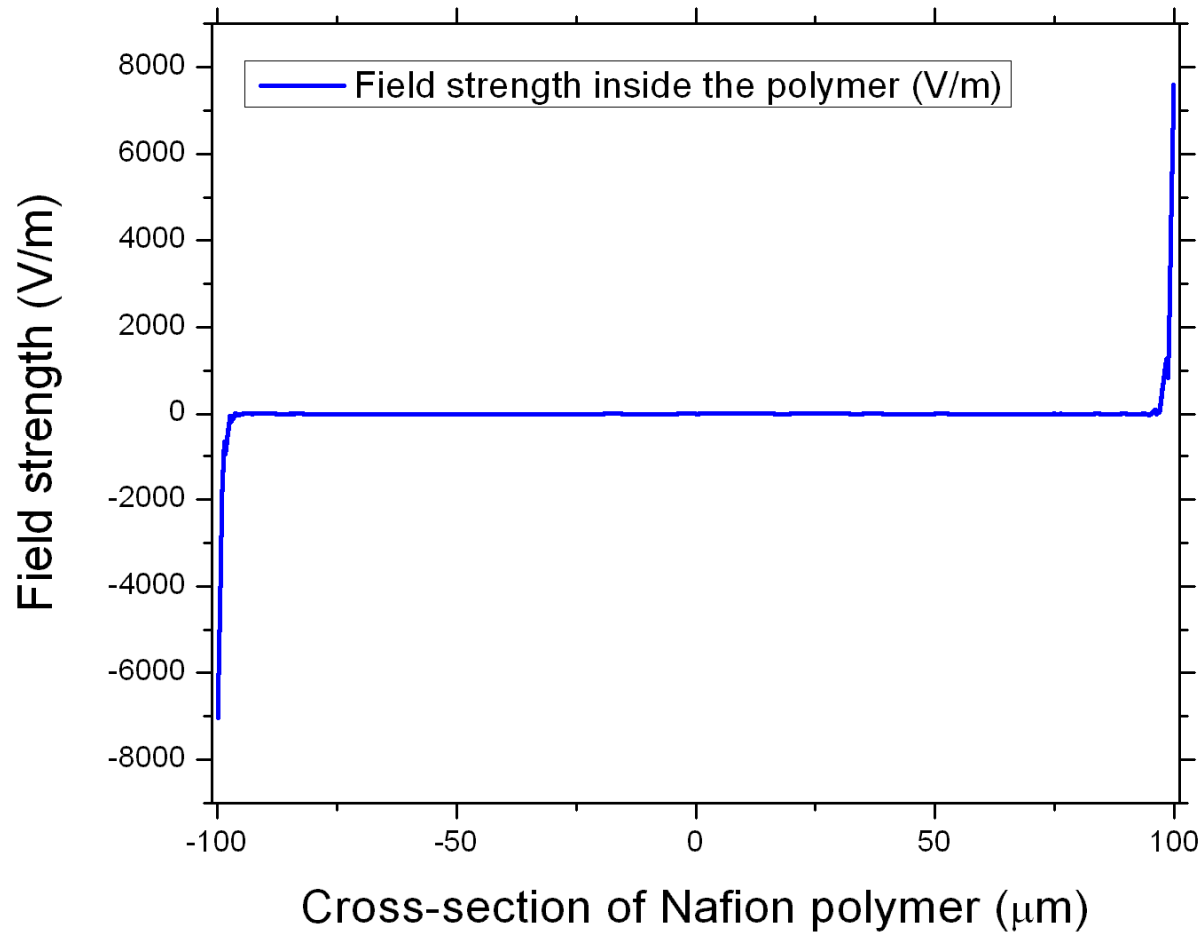


Actuation of an IPMC



- FEM model – a bit different approach
 - Euler beam model is not used
 - Our model is dynamic, not static
 - Viscoelasticity is also considered
- Assumption – charge imbalance creates longitudinal force inside the IPMC

$$\vec{F} = (A \cdot \rho + \text{sgn}(\rho) \cdot B \cdot \rho^2) \cdot \hat{x}$$

- We consider two terms – charge density and square of the charge density
- Constants A and B are fitted using experimental results

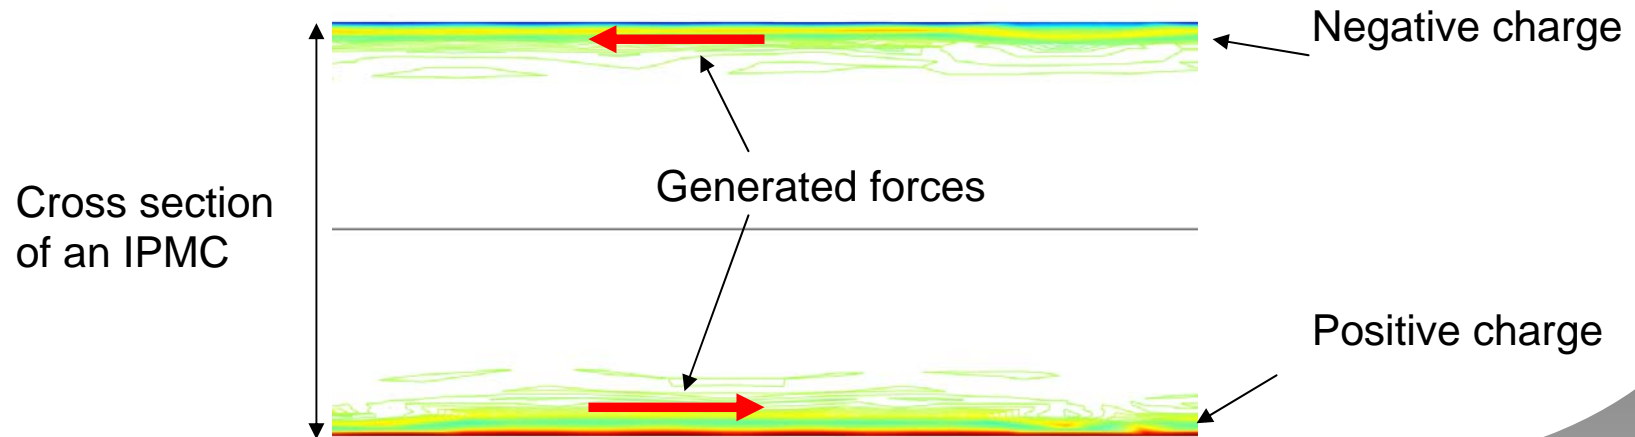

Mathematics behind the bending



- Continuum mechanics equations are used in the model
- The stress is related to the force in each point of the polymer:

$$-\nabla \cdot \sigma = \vec{F}$$

- The stress is related to strain:


$$\sigma = D\varepsilon$$

where ε and σ are column vectors with dimensions of 6


- Finally, the strain is related to displacement:

$$\varepsilon_i = \frac{\partial u_i}{\partial x_i}, \varepsilon_{ij} = \frac{1}{2} \left(\frac{\partial u_i}{\partial x_j} - \frac{\partial u_j}{\partial x_i} \right)$$

Simulations – cation migration, force

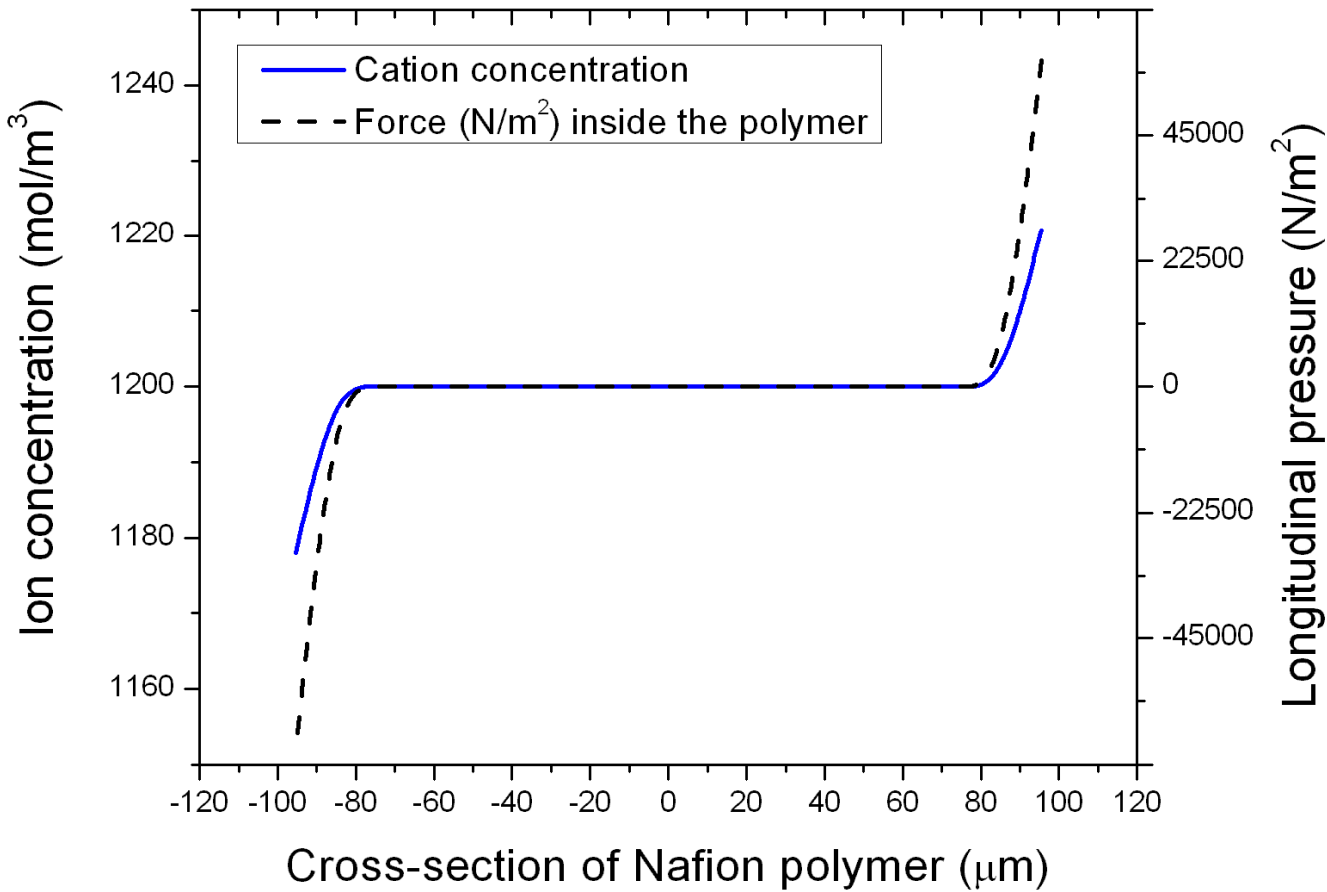

Simulations – generated stress

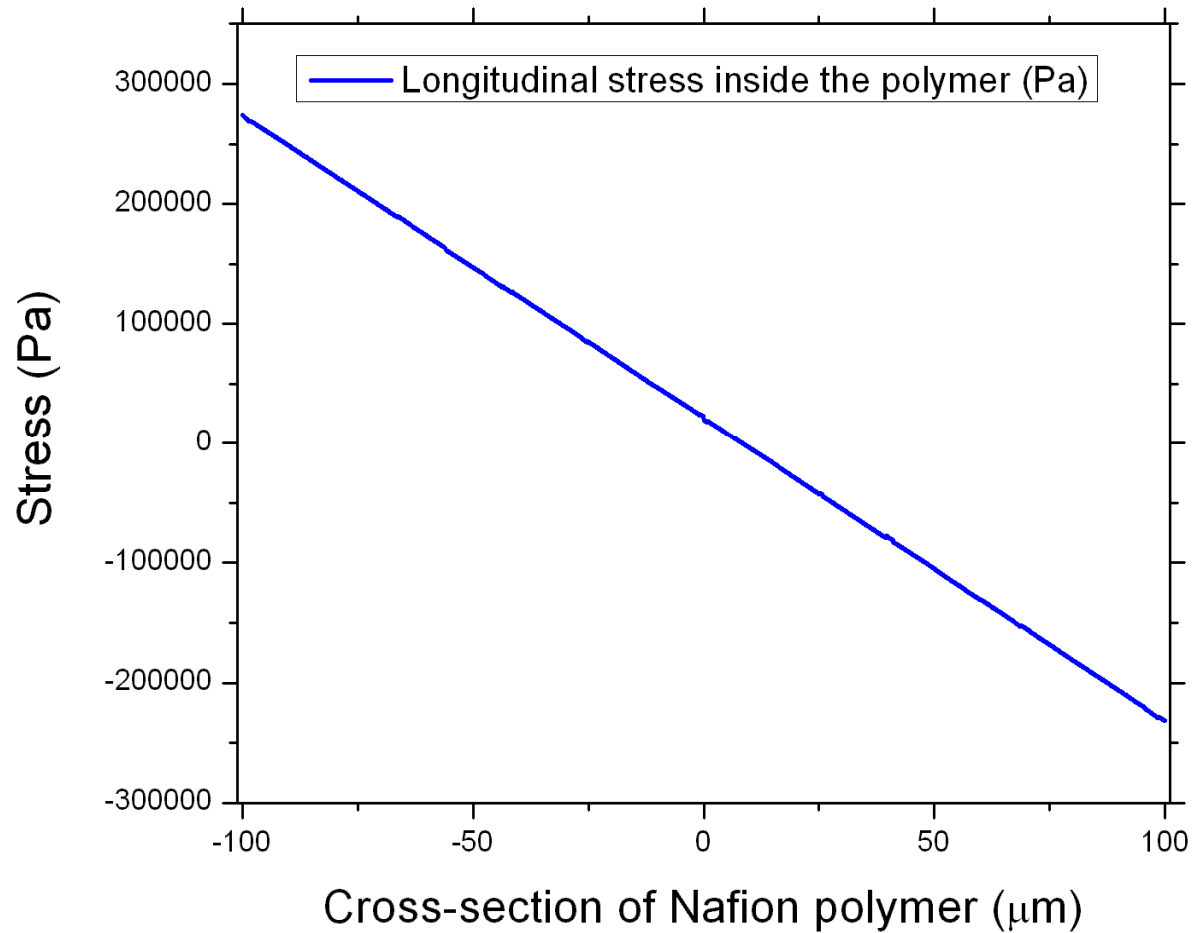

Transient analysis of bending



- Time dependent equations -> dynamic problem
- Motion of an IPMC sheet is described by:

$$\rho \frac{\partial^2 \vec{u}}{\partial t^2} - \nabla \cdot c \nabla \vec{u} = \vec{F}$$



- Rayleigh damping model:

$$m \frac{d^2 u}{dt^2} + \xi \frac{du}{dt} + ku = f(t) \quad \xi = \alpha m + \beta k$$


- ξ is a damping parameter. m is mass and k is stiffness. By coupling those equations for the system of multiple degrees of freedom:

$$\rho \frac{\partial^2 \vec{u}}{\partial t^2} - \nabla \cdot \left[c \nabla \vec{u} + c \beta \nabla \frac{\partial \vec{u}}{\partial t} \right] + \alpha \rho \frac{\partial \vec{u}}{\partial t} = \vec{F}$$

Simulation results

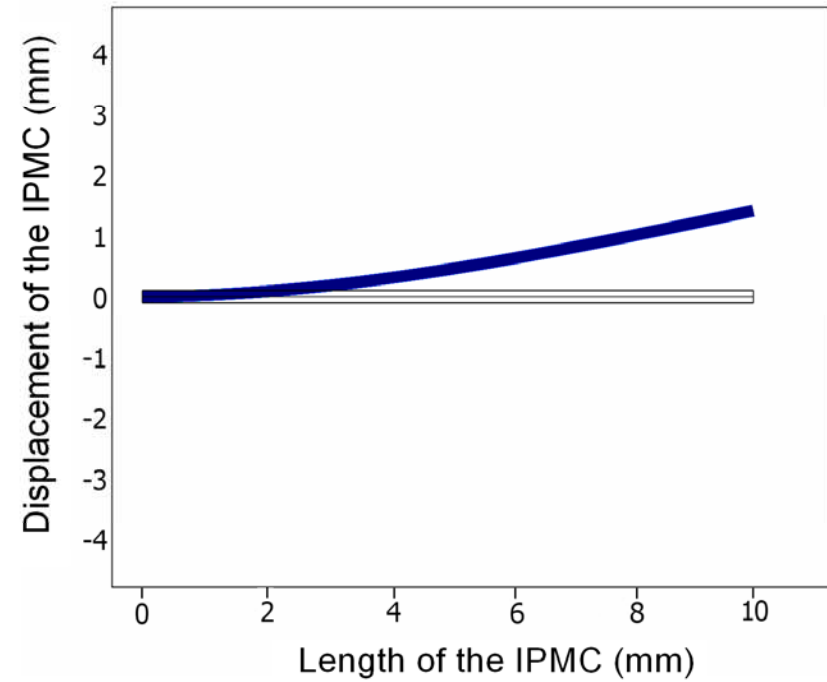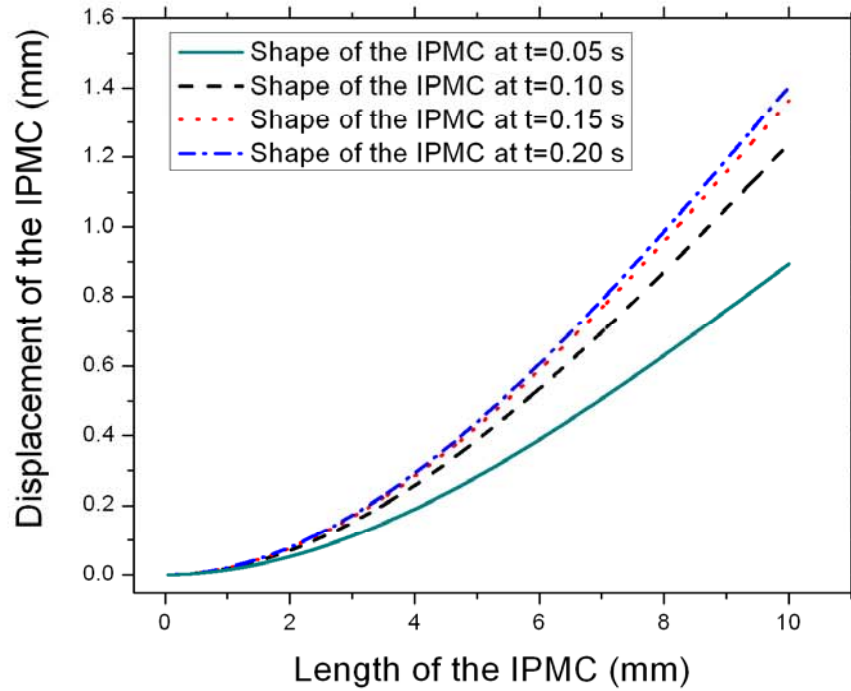


Tip displacement in time

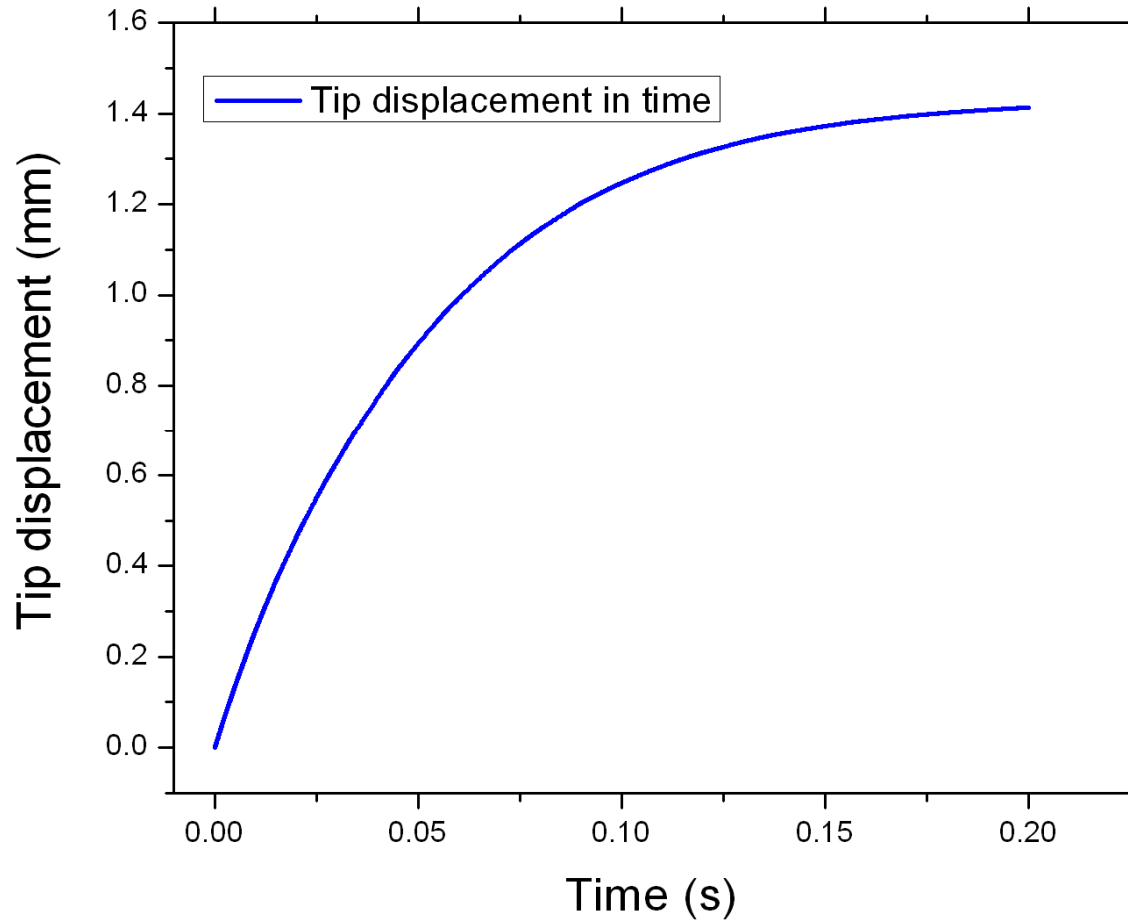

Conclusions



- We have a finite element model, which...
 - describes the movement of ions inside the polymer
 - describes the electric field
 - describes the dynamic bending of an IPMC sheet

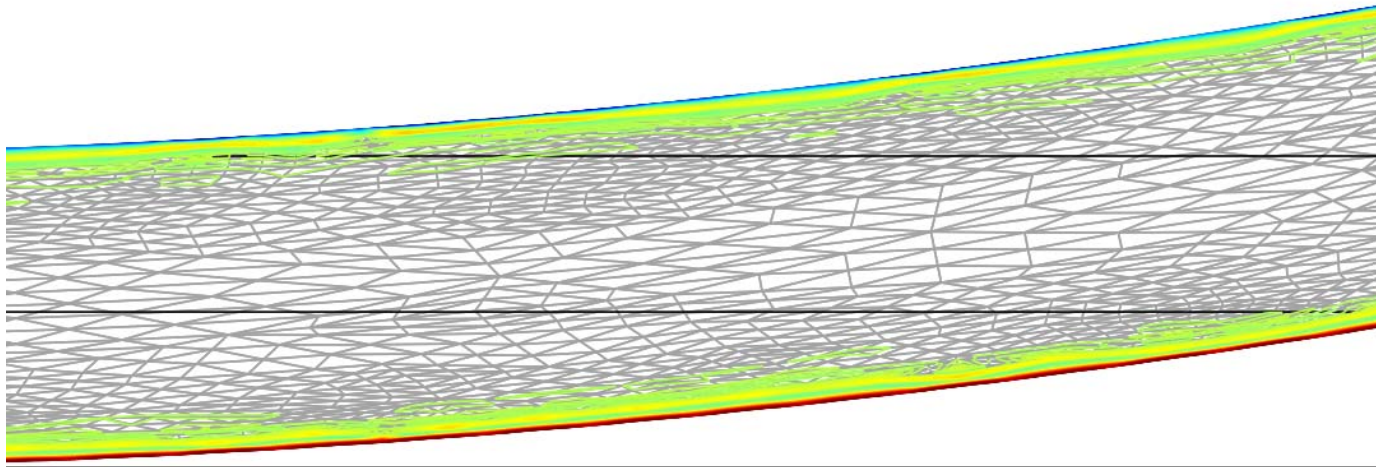


- For next, we add some complexity – electrochemical oscillations

Self-oscillations




- Electrochemical oscillations – common phenomena in nature
- Oscillations have also been experimentally studied
- Tests with IPMC:
 - immersed into acidic formaldehyde (HCHO) solution
 - applied constant voltage 0.75V
 - result: current oscillations and oscillating bending
- Cause of the oscillations are electrochemical reactions on Pt surface

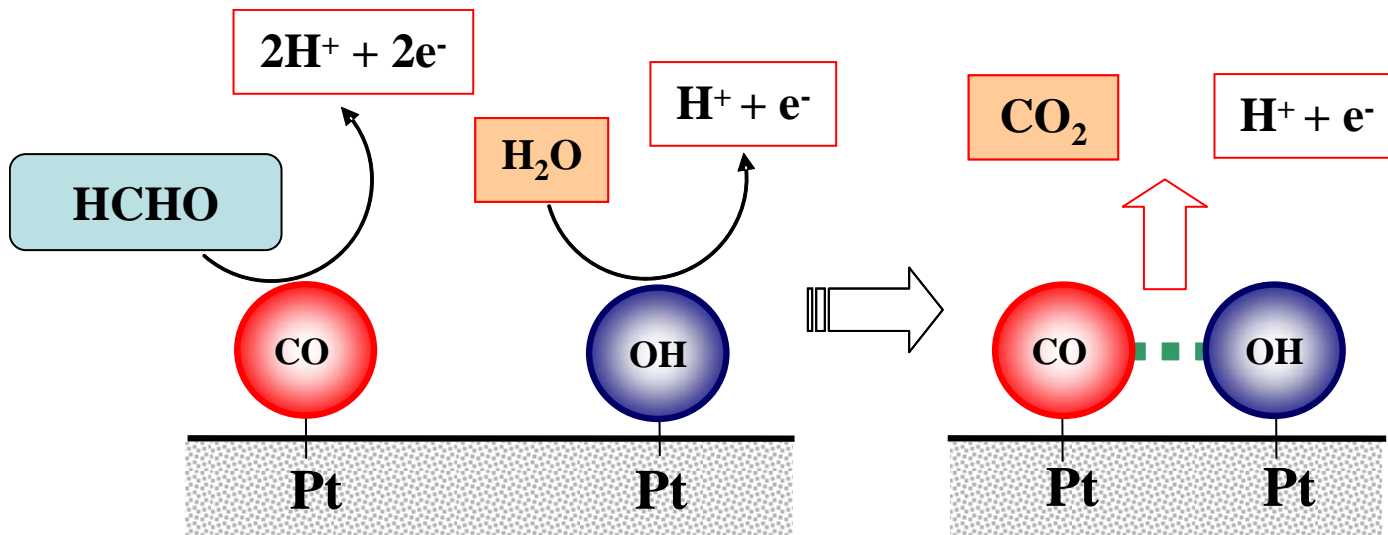

Simulating self-oscillations




- A double layer were initialized near the platinum surface.
- On that surface, the following reaction is modeled:



- 4 dynamic variables must be modeled on the platinum surface
 - time dependence of adsorption coverage of CO
 - time dependence of adsorption coverage of OH
 - HCHO concentration change in double layer
 - time dependence of potential on cathode
- These equations were coupled to the basic model...


Self-oscillations – model and experiment

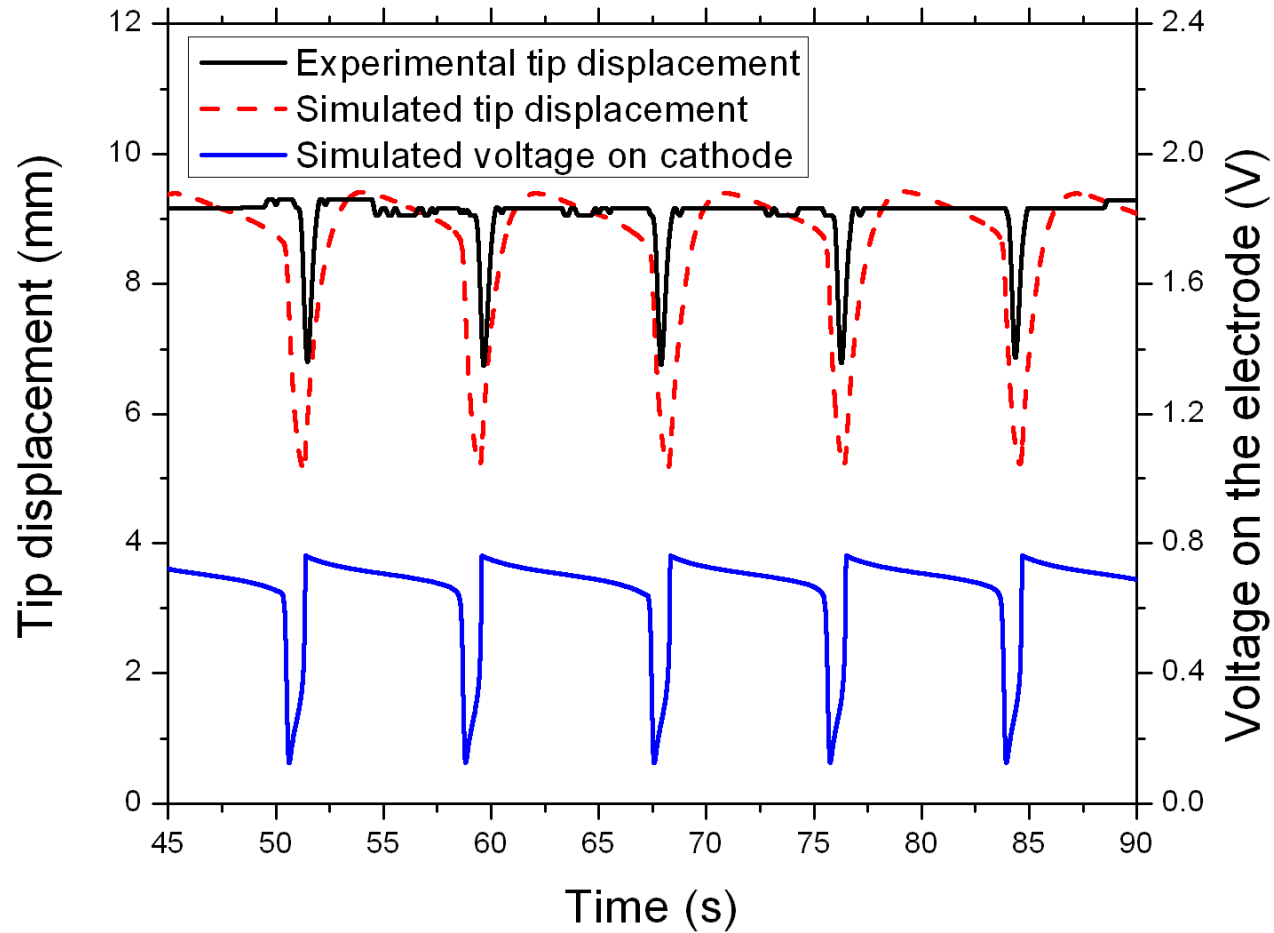

Conclusions and future plans



- 2D, basic FEM model was developed to describe time dependent actuation of an IPMC muscle
- In addition, more complexity was added by coupling a problem of electrochemistry.
- Also experimental and simulation results were compared and quite good agreement were found
- For future:
 - Adding 3rd dimension to the model
 - Considering fluid viscosity and corresponding equations inside the polymer
 - Work on the simulating the oscillation equations

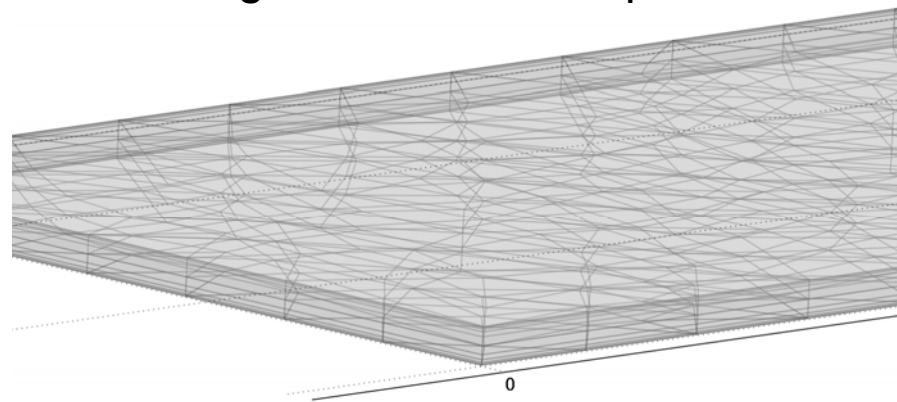

Questions



Thank you for your attention!